

Precoded EWF Codes for Unequal Error Protection of Scalable Video*

Dejan Vukobratović[†]
Dept. of Electronic and
Electrical Engineering,
University of Strathclyde,
Glasgow, UK
dejan.vukobratovic@
eee.strath.ac.uk

Vladimir Stanković, Lina
Stanković
Dept. of Electronic and
Electrical Engineering,
University of Strathclyde,
Glasgow, UK
{vladimir,lina}.stankovic@
eee.strath.ac.uk

Dino Sejdinović
Dept. of Electrical
and Electronic Engineering,
University of Bristol,
Bristol, UK
d.sejdinovic@bristol.ac.uk

ABSTRACT

Rateless codes are forward error correcting (FEC) codes of linear encoding-decoding complexity and asymptotically capacity-approaching performance over erasure channels with any erasure statistics. They have been recently recognized as a simple and efficient solution for packetized video transmission over networks with packet erasures. However, to adapt the error correcting capabilities of rateless codes to the unequal importance of scalable video, unequal error protection (UEP) rateless codes are proposed as an alternative to standard rateless codes. In this paper, we extend our recent work on UEP rateless codes called Expanding Window Fountain (EWF) codes in order to improve their UEP performance. We investigate the design of precoded EWF codes, where precoding is done using high-rate Low-Density Parity-Check (LDPC) codes, following the similar reasoning applied in the design of Raptor codes. The obtained results are presented in the context of UEP error correcting performance of EWF codes and applied on scalable video coded (SVC) transmission over erasure networks.

1. INTRODUCTION

Rateless codes, such as LT codes [1] or Raptor codes [2], have generated a lot of interest recently, first in the coding

*Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. *Mobimedia'09*, September 7-9, 2009, London, UK. Copyright 2009 ICST 978-963-9799-62-2/00/0004 ... \$5.00

[†]The research of Dejan Vukobratović was supported by a Marie Curie Intra European Fellowship within the 7th European Community Framework Programme.

theoretic community, and subsequently in many areas where they are recognized as an efficient solution. Transmission of packetized video content over networks with packet erasures is one of the fields where the research on rateless codes is intensive, and where the first applications of rateless codes have emerged both as theoretical proposals [3]-[6] and solutions for practical systems [7][8]. However, standard rateless codes are equal error protection (EEP) codes, which means that each packet of transmitted data block is equally protected. On the other hand, it is well known that recent video coding algorithms (e.g., H.264 SVC [9]) output data encoded into layers of different importance. Optimal matching of error correcting code and video coded blocks containing unequally important data is achieved by applying unequal error protection (UEP) codes, where more important parts of the data block (e.g., the base layer of scalable video) are better protected than less important parts (e.g., subsequent enhancement layers). Therefore, rateless codes offering UEP protection became part of recent research interest in error correcting coding for multimedia transmission applications.

Expanding Window Fountain (EWF) codes are a recently introduced class of UEP rateless codes [10]. They have been investigated as a flexible and efficient solution for scalable video multicast to heterogeneous receivers [11]. Appealing features of EWF codes include existence of: (i) asymptotic expressions for error recovery probabilities for each importance class after the iterative decoding of a fixed amount of received EWF encoded packets, and (ii) a number of design parameters open for optimization with respect to different performance criteria. Following a similar reasoning applied in the design of Raptor codes, which resulted in performance/complexity improvements of Raptor codes over LT codes, in this paper we investigate the design of precoded EWF codes as EWF-like UEP counterparts of Raptor codes. We analyze UEP error correcting performance of precoded EWF codes and compare it with EWF codes and standard EEP rateless codes. The application and simulation results of precoded EWF codes applied on scalable coded multicast over erasure networks are presented.

2. BACKGROUND ON RATELESS CODES

LT codes [1] are the first practical capacity-approaching rateless codes. They enable a transmitter to generate potentially infinite amount of encoded symbols from a source block of

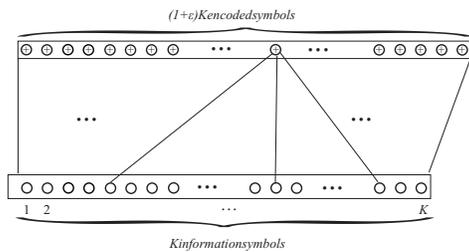


Figure 1: LT Codes.

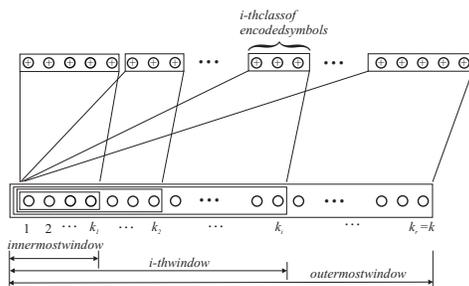


Figure 2: EWF Codes.

length K information packets. LT encoding is a simple process where, for each encoded packet, a degree d is sampled from a degree distribution $\Omega(d)$, and d out of K information packets from the source message are uniformly selected and bit-wise XOR-ed to produce the encoded packet (Fig. 1). Robust Soliton degree distribution $\Omega_{RS}(d)$ is designed such that, together with an iterative Belief-Propagation (BP) decoder, capacity-achieving performance of LT codes is obtained. Using LT codes, the receiver is able to decode the source message with any $K + O(\sqrt{K} \ln^2(K/\delta))$ received encoded symbols with probability $1 - \delta$. However, the average degree of $\Omega_{RS}(d)$ scales as $O(\ln(K/\delta))$, hence the average LT encoding-decoding complexity grows log-linearly as $O(K \ln(K/\delta))$ with the source block length K .

Raptor codes [2] are linear encoding-decoding complexity capacity-approaching rateless codes. They consist of an outer high-rate LDPC pre-code concatenated with an inner LT code, which is defined by weakened, constant average, degree distribution $\Omega_R(d)$. The idea behind the Raptor code design is to first recover a constant (close to one) fraction of intermediate packets (outer LDPC pre-code codeword) from the received LT encoded packets using an inner LT code with linear encoding-decoding complexity, and then to recover the source block information packets by exploiting high-rate linear encoding-decoding complexity outer LDPC pre-code. As a pre-code, one can apply any LDPC code design providing good high-rate LDPC codes. In LT coding phase, different options for the degree distribution $\Omega_R(d)$ are discussed in [2], both for asymptotic and finite-length Raptor code design.

Both LT and Raptor codes are EEP rateless codes. Recently, EWF codes were introduced as a novel class of UEP rateless codes based on the idea of “windowing” the source block to be transmitted. For video streaming applications, we

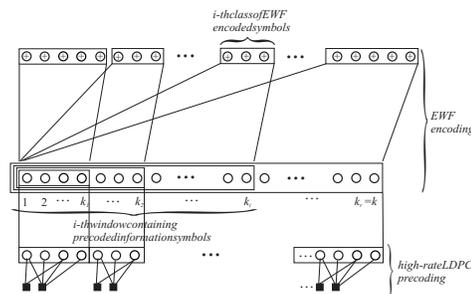


Figure 3: Precoded EWF Codes.

assume that EWF codes are applied on consecutive source blocks of K symbols (information packets). The set of expanding windows defined over the source block determines the set of importance classes associated with different quality layers of scalable coded video. For each importance class, asymptotic probability (as $K \rightarrow \infty$) that an information symbol of the class is not recovered after l iterations of the iterative BP decoder can be determined analytically using simple set of recursive formulae [10]. This analytical tool is a basis for the optimized EWF code design for scalable video transmission presented in [11].

The set of r expanding windows are defined over the source block using polynomial $\Pi(x) = \sum_{i=1}^r \Pi_i x^i$, where $\Pi_i = \frac{k_i - k_{i-1}}{K}$ and k_i is the i -th window size (Fig. 2). The set of expanding windows is characterized by a window selection probability distribution described by polynomial $\Gamma(x) = \sum_{i=1}^r \Gamma_i x^i$, where Γ_i is the probability of selecting the i -th window. Finally, a degree distribution $\Omega^{(j)}(x) = \sum_{i=1}^{k_j} \Omega_i^{(j)} x^i$ is associated with the j -th expanding window, $1 \leq j \leq r$, which provides additional degree of freedom in EWF code design to apply different degree distributions on different windows. EWF encoding proceeds in a slightly different fashion than the usual LT encoding. To create a new EWF encoded symbol, first, one of the windows is randomly selected with respect to the window selection probability distribution $\Gamma(x)$. Then, a new encoded symbol is determined with an LT code described by the selected window degree distribution as if encoding were performed only on the input symbols from the selected window. This procedure is repeated at the EWF encoder for each encoded symbol. The decoding process at the receiver exploits the same iterative BP decoder applied in LT decoding.

3. PRECODED EWF CODES

In this section, we discuss our motivation for the introduction of precoded EWF codes and the details of their design. Their UEP performance in terms of simulated BER (FER) for different importance class is presented and compared with the corresponding EWF codes designed without precoding.

3.1 Code Design

To perform with linear encoding/decoding complexity, the EWF code ensembles utilize the output degree distributions of constant average degree [10]. However, it is well known that the constant average degree distributions applied in LT

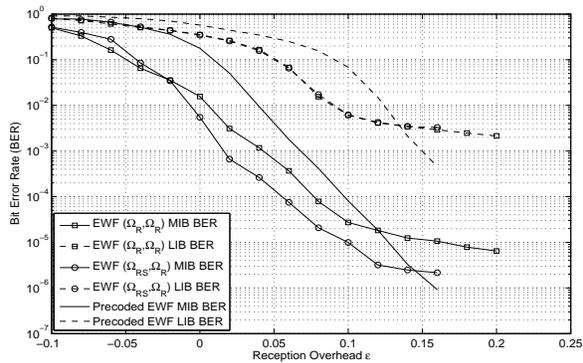


Figure 4: Performance comparison of MIB and LIB BER between EWF and Precoded EWF codes.

code design result in high error floor in their BER performance curves, due to the information symbols which remain “uncovered” by the encoded symbols. This problem is solved in standard LT code design with the introduction of Raptor codes, where LT codes are precoded using good high-rate error correcting codes such as LDPC codes [2].

Applying the same idea, in this paper we consider the design of precoded EWF codes, where precoding is performed separately for each importance classes of information symbols using high-rate LDPC codes. During the precoding process the input symbols of the i -th importance class are encoded using the high-rate LDPC code corresponding to their importance class, and the obtained codeword represents a new set of input symbols of the i -th importance class. Therefore, to define precoded EWF code, in addition to the EWF code design parameters introduced before, it is necessary to define the set of r LDPC pre-codes C_i applied on the i -th importance class. LDPC precode $C_i(k, n)$ is assumed to be a rate R_i LDPC code of information block length $k = k_i - k_{i-1}$ and codeword length $n = k/R_i$ (Fig. 3). Using precoding that separately precodes different importance classes, the content of each importance class can be independently recovered at the receiver side using the iterative decoder that operates simultaneously on both the LT part of the code graph and the LDPC code graphs associated with each of the importance classes. Additionally, this design allows for independent calculations of the reception overheads of different importance classes in such a way that a full recovery of symbols of different importance classes is asymptotically guaranteed.

3.2 UEP Performance

In this section, we investigate the UEP performances of precoded EWF codes and compare them with standard EWF codes. For simplicity, we assume that precoding is performed over EWF codes with two importance classes ($r = 2$): the class of Most Important Bits (MIB) and Least Important Bits (LIB). Both MIB and LIB class are precoded using concatenated Hamming/LDPC codes, adopted in [7] for precoding Raptor codes. In the first scenario, we assume the information block length $K = 5000$, where MIB class contains $k_1 = 500$ information symbols, and LIB class contains $K - k_1 = 4500$ information symbols, and the MIB

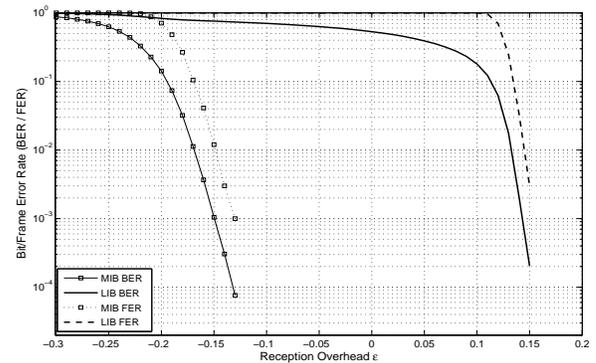


Figure 5: MIB/LIB BER/ FER Performances of Precoded EWF codes of length $N = 20000$.

window selection probability $\Gamma_1 = 0.083$ [10]. LDPC pre-codes applied on MIB and LIB class are rate $R_1 = 0.905$ LDPC code $C_1(500, 553)$ and rate $R_1 = 0.965$ LDPC code $C_2(4500, 4664)$, respectively. The degree distribution applied on both windows is constant average degree distribution $\Omega_R(x)$ of maximum degree $d_{max} = 66$, adopted for Raptor code design [2]. Fig. 4 presents BER performance as a function of the reception overhead ϵ for the precoded EWF code, where the reception overhead quantifies the number of collected encoded packets at the receiver $N = (1 + \epsilon)K$. The same figure compares BER performances of the precoded EWF code with two standard EWF codes: the one with the same degree distribution $\Omega_R(x)$ applied on both windows (EWF(Ω_R, Ω_R)), and the one with “stronger” Robust Soliton degree distribution $\Omega_{RS}(x)$ of maximum degree $d_{max} = 500$ applied over the MIB window only (EWF(Ω_{RS}, Ω_R)). Fig. 4 illustrates that standard EWF codes demonstrate error floor behavior on high reception overheads. The error floor can be improved by applying stronger distribution on the MIB class for the price of higher encoding-decoding complexity (switching from linear to log-linearly complexity with MIB class size). By applying precoding on EWF codes, the error floor problem vanishes while encoding-decoding complexity remains linear. However, both MIB and LIB BER performance waterfall regions shift towards larger overhead values thereby introducing the delay in MIB class decoding. Fig. 5 demonstrates that for larger information block lengths such as $K = 20000$, this “finite-length” effect slowly disappears.

4. PRECODED EWF MULTICAST PERFORMANCE

In this section, we assume that a scalable video sequence with base layer (BL) and a number of enhancement layers (EL) is transmitted to the set of receivers belonging to two receiver classes. The class of worse and better receivers are able to collect encoded packets with reception overheads ϵ_1 and ϵ_2 , respectively. We assume the multicast source is applying EWF codes on source blocks of length $K = 5000$ information packets with $r = 2$ windows, where the MIB class of size $k_1 = 500$ information symbols contains BL, and the LIB class of length $K - k_1 = 4500$ information symbols contains remaining ELs. The goal is to design an EWF based multicast/broadcast solution that will enable worse receivers to recover MIB class with probability P_1 , and better

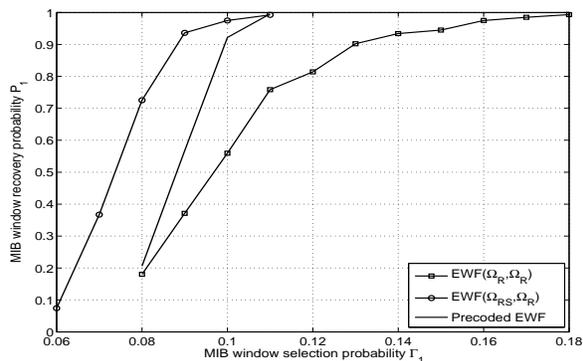


Figure 6: MIB window recovery probability as a function of MIB window selection probability Γ_1 .

receivers to recover both MIB and LIB classes with probability P_2 , for a given probability pair $\mathbf{P} = (P_1, P_2)$.

We assume that the worse receiver class reception overhead is $\epsilon_1 = 0$ (i.e., the number of received encoded packets $N = 5000$). Note that with the zero reception overhead, standard EEP rateless codes are able to recover only a negligible fraction of the source block. Fig. 6 illustrates the probability of recovery of the MIB window data as a function of the MIB window selection probability Γ_1 for the same EWF and precoded EWF codes analyzed in Fig. 4 (Section 3.2). From Fig. 6, we can read the Γ_1 values needed to achieve desired P_1 for each class of simulated codes. For example, if $P_1 = 0.99$, we can see that $\Gamma_1(\text{EWF}(\Omega_{RS}, \Omega_R)) = \Gamma_1(\text{Precoded EWF}) \approx 0.11$, whereas $\Gamma_1(\text{EWF}(\Omega_R, \Omega_R)) = 0.175$. These results demonstrate that MIB decoding performance of precoded EWF codes and $\text{EWF}(\Omega_{RS}, \Omega_R)$ are close for $K = 5000$, but from the performance of precoded EWF codes for $K = 20000$ presented in Fig. 5, we expect gradual improvement in favour of precoded EWF codes as $K \rightarrow \infty$.

For the LIB class decoding, the performance differences are already visible on source block length $K = 5000$. If we fix Γ_1 values from Fig. 6 that guarantee $P_1 = 0.99$ for respective codes, we can investigate the reception overhead ϵ_2 of the better receiver class that guarantees $P_2 = 0.99$. Fig. 7 presents the probability P_2 that the better receiver will recover the whole source block as a function of the reception overhead ϵ_2 . Clearly, for LIB class recovery, precoding provides superior performance as precoded EWF codes are able to finish the LIB decoding with $N \approx 5900$ received encoded symbols ($\epsilon_2 = 0.18$), whereas this value is $N \approx 12000$ ($\epsilon_2 = 1.4$) and $N \approx 14000$ ($\epsilon_2 = 1.8$) for $\text{EWF}(\Omega_{RS}, \Omega_R)$ and $\text{EWF}(\Omega_R, \Omega_R)$ codes, respectively. This superior performance follows from the fact that the error-floor, which is particularly high for LIB class decoding of standard EWF codes (Fig. 4), is removed by precoding.

5. CONCLUSIONS

In this paper, we enhanced the design of a class of UEP rateless codes called EWF codes, by introducing precoding of each importance class of the source block using high-rate LDPC codes. The performance benefits of precoding are

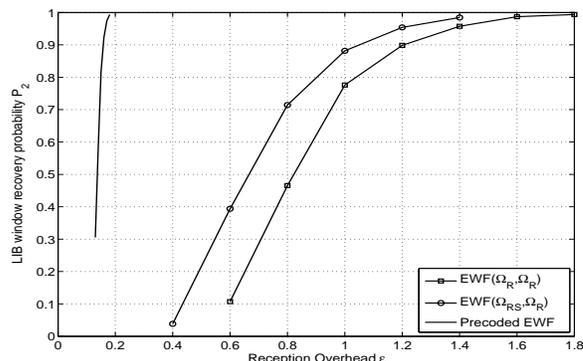


Figure 7: MIB and LIB window recovery probability as a function of reception overhead ϵ_2 .

discussed as they may significantly improve the performance of EWF-based scalable video multicast system.

6. REFERENCES

- [1] M. Luby, "LT Codes," *Proc. IEEE FOCS 2002*, Vancouver, Canada, Nov. 2002.
- [2] A. Shokrollahi, "Raptor Codes," *IEEE Trans. Inform. Theory*, vol. 52, No. 6, pp. 2551–2567, June 2006.
- [3] J. P. Wagner, J. Chakareski, and P. Frossard, "Streaming of scalable video from multiple sources using Rateless codes," *Proc. IEEE ICME 2006*, Toronto, Canada, July 2006.
- [4] T. Stockhammer, T. Gasiba, W. A. Samad, T. Schierl, H. Jenkac, T. Wiegand and W. Xu, "Nested harmonic broadcasting for scalable video over mobile datacast channels," *Wiley - Wireless Comms. and Mobile Computing*, vol. 7, no. 2, pp. 235–256, Feb. 2007.
- [5] Q. Xu, V. Stanković, and Z. Xiong, "Wyner-Ziv video compression and fountain codes for receiver-driven layered multicast," *IEEE Trans. Circ. and Syst. for Video Tech.*, vol. 17, pp. 901–906, July 2007.
- [6] T. Schierl, S. Johansen, A. Perkis, and T. Wiegand, "Rateless Scalable Video Coding for Overlay Multisource Streaming in MANETs," *Journal of Visual Comm. and Image Repres.*, vol. 19, no. 9, pp. 500–507, Dec. 2008.
- [7] "Universal Mobile Telecommunications System (UMTS): Mobile Broadcast/Multicast Service (MBMS): Protocols and Codecs," 3GPP TS 26.346, Ver. 6.3.0, Release 6, Dec. 2005.
- [8] "Digital Video Broadcasting (DVB): IP Datacast over DVB-H: CDP", ETSI TS 102 472, 2006.
- [9] H. Schwarz, D. Marpe, and T. Wiegand, "Overview of the Scalable Video Coding Extension of the H.264/AVC Standard," *IEEE Trans. Circuits and Systems for Video Tech.*, vol. 17, pp. 1103–1120, September 2007.
- [10] D. Sejdinović, D. Vukobratović, A. Doufexi, V. Šenk, and R. Piechocki, "Expanding Window Fountain Codes for Unequal Error Protection," to appear, *IEEE Trans. Communications*, 2008.
- [11] D. Vukobratović, V. Stanković, D. Sejdinović, L. Stanković, and Z. Xiong, "Scalable Video Multicast Using Expanding Window Fountain Codes," to appear, *IEEE Trans. Multimedia*, 2009.